


Counterflow Filter Housing

The Easy-Access Housing

- Uses standard filters
- Easy access to filters
- Filters angled to maximize surface
- Counterflow housing
- Sizes 1-4 tons
- Embossed, heavy steel gauge
- Completely insulated
- Filter access without vent pipe interference

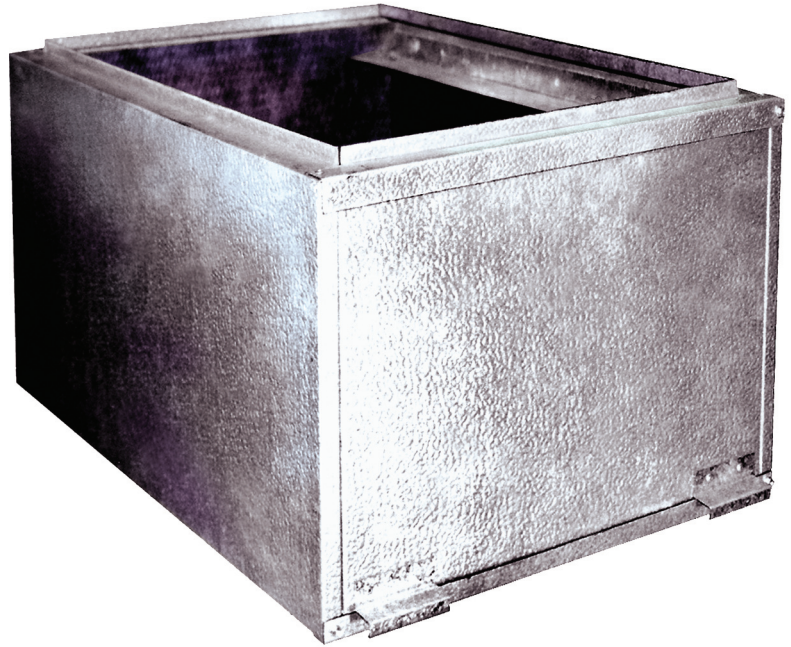

| MODEL | Overall | | | Duct Opening | | Unit Opening | | QTY | FILTER |
|-------|-------------------|-------------------|----|-------------------|-------------------|-------------------|-------------------|-----|-------------|
| | A | B | C | D | E | F | G | | |
| CF-1 | 15 ^{3/4} | 21 ^{3/8} | 12 | 13 ^{3/4} | 19 ^{7/8} | 12 ^{5/8} | 20 ^{1/8} | 2 | 10 X 20 X 1 |
| CF-2 | 18 ^{3/4} | 21 ^{3/8} | 12 | 16 ^{3/4} | 19 ^{7/8} | 16 ^{1/8} | 20 ^{1/8} | 3 | 10 X 20 X 1 |
| CF-3 | 23 ^{1/4} | 21 ^{3/8} | 12 | 21 ^{1/4} | 19 ^{7/8} | 20 | 20 ^{1/8} | 3 | 10 X 20 X 1 |
| CF-4 | 27 ^{3/4} | 21 ^{3/8} | 12 | 25 ^{3/4} | 19 ^{7/8} | 23 ^{3/8} | 20 ^{1/8} | 4 | 10 X 20 X 1 |